



# R I N G S I Z E R

**IMPORTANT:** Please uncheck or disable all "Scale to fit page" and similar settings before printing this page. You will need to print this page at 100% (actual size) to ensure that the ring sizer, and ring size chart area are accurate.

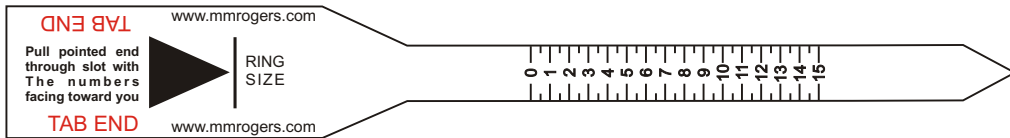

Copyright © 2007 M. M. Rogers Design - All rights reserved



1. Measure ring sizer from end to end. For correct fit the sizer should measure 5 1/4" from end to end.
2. Cut the sizer out and make a slit on the line in front of the black triangle.
3. Wrap the sizer around the finger where you will wear the ring.
4. With the tab end visible pull the small end through the slit so that the numbers are facing toward you.
5. Make sure the sizer is in the "notch" closest to the palm between the first and second knuckle.
6. Pull the long narrow portion of the sizer through the slit until is snug - but not so tight that the paper begins to tear!
7. The number at the slot is your ring size. If the size falls between two numbers, add 1/2 size to the lower number.

To measure ring size with an existing ring, use the chart below to find the size which most closely matches the inside [circumference] of the ring. If the inside of the ring completely covers the circle so that it is no longer visible - go to the next size up for correct sizing.

